

# InteliVision 5 CAN InteliVision 5 CAN Backlit

CONTROLLER COLOUR DISPLAY  
UNIT WITH CAN BUS INTERFACE



InteliVision 5 CAN



InteliVision 5 CAN Backlit



## Description

InteliVision 5 CAN is a new generation remote display unit for the following controllers:

- ▶ InteliDrive DCU Industrial
- ▶ InteliDrive Mobile
- ▶ InteliDrive Mobile Logger
- ▶ InteliDrive DCU Marine
- ▶ InteliGen<sup>NT</sup> Marine<sup>1)</sup>
- ▶ InteliSys<sup>NT</sup> Marine<sup>1)</sup>
- ▶ InteliGen<sup>NT</sup> Marine GeCon<sup>1)</sup>
- ▶ InteliSys<sup>NT</sup> Marine GeCon<sup>1)</sup>

It is designed as a simple, easy to use Plug and Play solution.

<sup>1)</sup> InteliVision 5 CAN Backlit version only

## Order codes

Item	Order code
InteliVision 5 CAN	INTELIVISION 5 CAN
InteliVision 5 CAN Backlit	INTELIVISION 5 CAN BACKLIT
InteliVision 5 Harness-2	INTELIVISION 5 HARNESS-2
InteliVision 5 IP65 Connector	INTELIVISION 5 IP65 CONNECTOR




ComAp is a member of AMPS (The Association of Manufacturers of Power generating Systems).



ComAp products meet the highest standards, with every stage of production undertaken in accordance with the ISO certification obtained in 1998.



The product has the UL Certification.


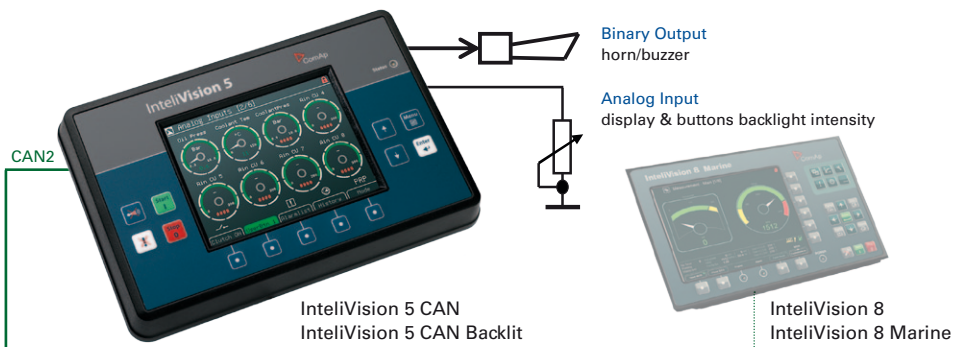


## Benefits


Plug and Play operation (auto configuration based on controller application). Simpler, faster and more comfortable control for the user. More information in less time.

## Features

- ▶ 5,7" Colour TFT Display, resolution 320x240 pixels, anti-glare front coating
- ▶ Galvanically separated CAN interface
- ▶ Up to 5 IntelIVision 5 CAN displays with IntelliDrive DCU Marine controller
- ▶ Auto configuration based on controller application
- ▶ Active buttons
  - fast access to important data
- ▶ Customer screen configuration
- ▶ Configurable button's functionality
- ▶ Backlit buttons (backlit version only)
- ▶ Analog input to control backlight intensity
- ▶ Binary output for horn/buzzer control
- ▶ Same cut out as standard ComAp controllers, e.g. IntelliDrive DCU, 113 mm x 175 mm (4,4" x 6,9")
- ▶ Sealed to IP65
- ▶ Power supply 8–36 VDC
- ▶ Backlight intensity analog input range 0–2400 Ω
- ▶ Horn output load capability 0,5 A/36 V
- ▶ Operating temperature -20°C to +70°C
- ▶ Storage temperature -30°C to +80°C

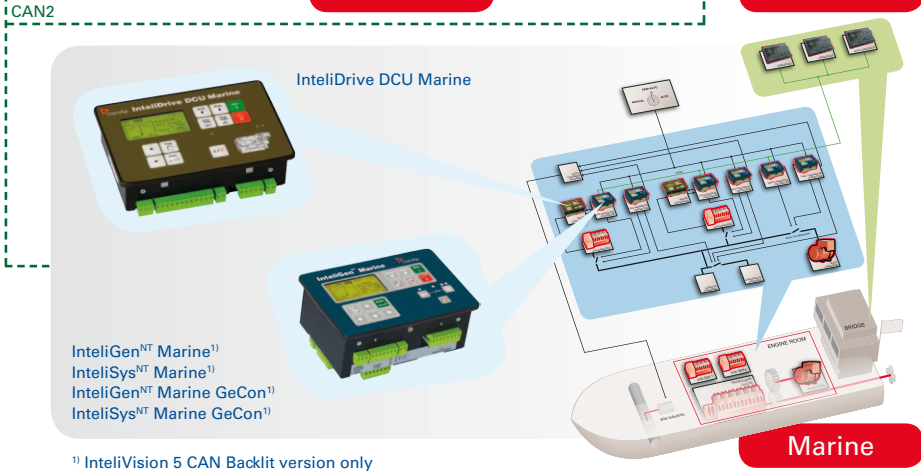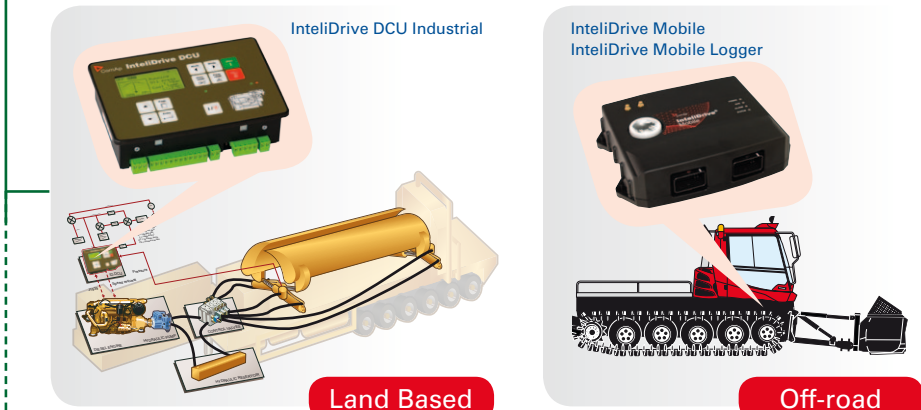

<sup>1)</sup> IntelIVision 5 CAN Backlit version only

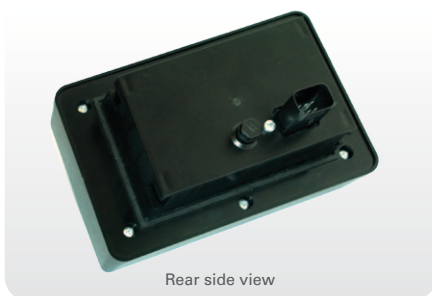


MANUFACTURER:

**ComAp, spol. s r. o.**

Czech Republic  
Phone: + 420 246 012 111  
Fax: + 420 266 316 647  
E-mail: [info@comap.cz](mailto:info@comap.cz)  
Internet: [www.comap.cz](http://www.comap.cz)

LOCAL DISTRIBUTOR / PARTNER:

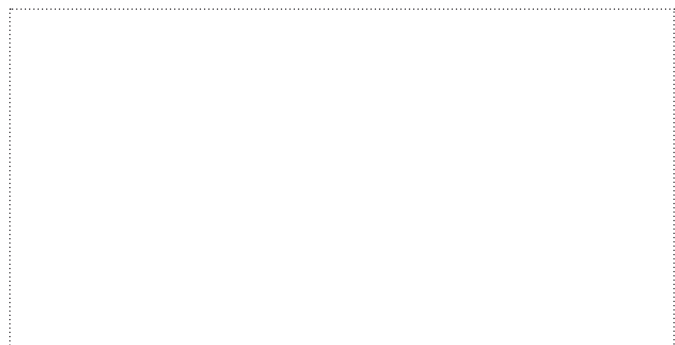

**Customer satisfaction is our mission. We continuously develop the best people to succeed in our mission.**